




2x2 Mechanical Multi-mode Fiberoptic Switch

AC Photonics' MMS Series switch connects optical channels by redirecting an incoming optical signal into a selected output fiber. This is achieved using patent pending opto-mechanical proprietary configurations and activated via an electrical control signal. The mechanical operation offers ultra-high reliability and fast switching speed as well as bi-directional performance. The MMS fiberoptic switches are true switching solution for optical networking applications.

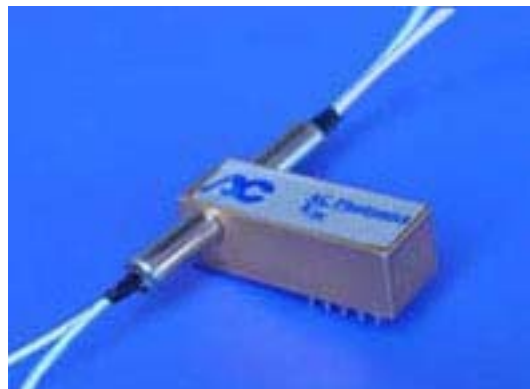

Features

- Unmatched Low Cost
- Low Insertion Loss
- Latching or Non-Latching
- High Channel Isolation
- Highly Stable and Reliable
- Epoxy Free Optical Path

Applications

- Optical Signal Routing
- Optical Network Protection/Restoration
- Configurable Optical Add/Drop
- Transmitter and Receiver protection
- Network Test Systems
- Instrumentation

Performance Specifications

Parameter	SPECIFICATION	
Operating Wavelength (nm)	830±40,1310±40 or 1550±40	830/1310, 850/1550, 1310/1550
Insertion Loss (dB)	≤1.0 (P Grade), ≤1.2 (A Grade)	≤1.2 (P Grade), ≤1.4 (A Grade)
Wavelength Dependent Loss(WDL)(dB)	≤0.25	≤0.30
PDL (dB)	≤0.05	
Cross Talk (dB)	≥35	
Return Loss (dB)	≥35	
Switching Speed (ms)	≤10 (4 typ.)	
Drive voltage (V)	5	
Power Handling(mW)	500	
Durability (Cycles)	10 Million	
Operating Temperature (°C)	0~+70	
Storage Temperature (°C)	-40~+85	
Dimensions (mm)	32.6x12.6x11.0 (Or custom size)	


Specifications may change without notice

Ordering Information

MMS	□ □	□ □ □ □	□	□	□	□ □
Option	Operating Wavelength	Port	Grade	Fiber Type	Pigtail Style	In/Out Connector
L= Latching N=Non Latching	13= 1310±40nm 15= 1550±40nm 85= 850±40nm 35=1310/1550nm 38=1310/850nm 58=1550/850nm	0202=2x2	P=P Grade A=A Grade	1=50/125 multi-mode 2=62.5/125 multi-mode	1=Bare Fiber 2=900um Jacket.	0=None 1=FC/APC 2=FC/PC 3=SC/APC 4=SC/PC 5=ST 6=LC



Dimensions (mm)

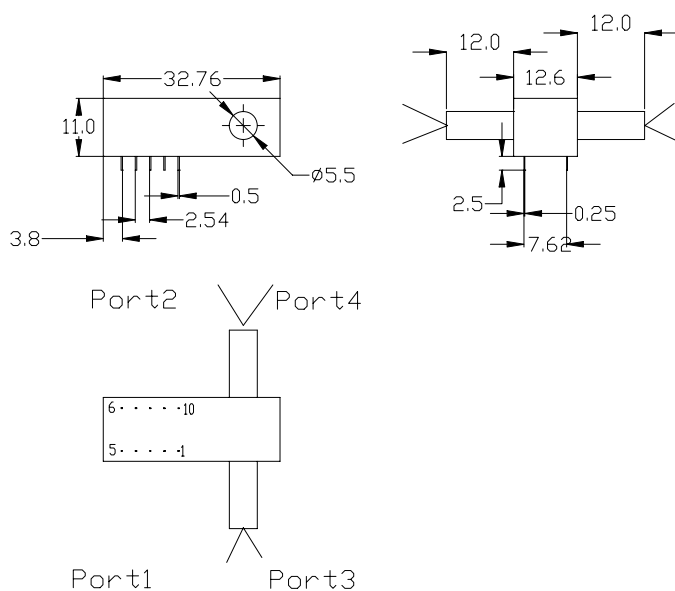

Electric Configuration

Optical Path		Port1-3 and Port2-4		Port1-4 and Port2-3	
Electric Drive	Non-Latching	Pin1	Pin10		
	Latching	Pin1	Pin5	Pin6	Pin10
		V+	GND	GND	V+
Status Sensor	Non-Latching and Latching	Pin2-3, Pin8-9 Open		Pin2-3, Pin8-9 Close	
		Pin3-4, Pin7-8 Close		Pin3-4, Pin7-8 Open	

Parameter	Typical	Min	Max	Unit
Switch Voltage	5	4.5	5.5	V
Switch Current		>40		mA
Pulse Duration		>25		ms

